






NO.	NAME	MATERIAL	FINISH
1	Housing	Nylon PA9T UL94V-0	
2	Terminal	Phosphor BronzeC5191	Gold & Sn Plated
3	Shell	SUS 430	Ni Plated
4	Mylar	Polyimide	

TUA-S10F2M B - A M 0 S4 - TMR2




Series
Type
Color
B : Black

Shell
S4 : Nickel Plated
Version
0 : Gold Flash
Material
A : High-Thermoplastic

Tape & Reel + Mylar

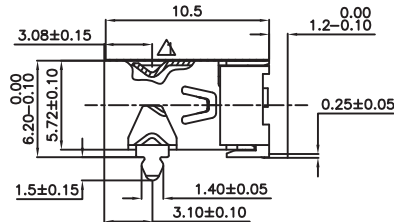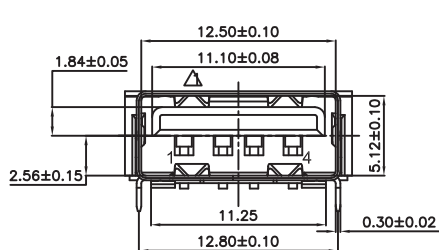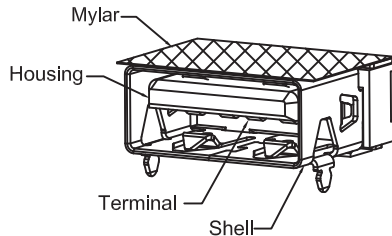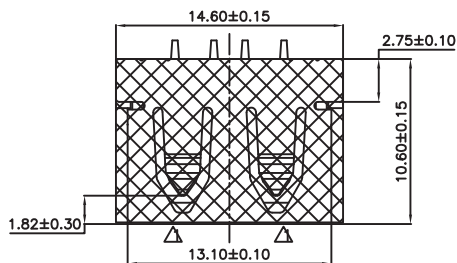

Mylar尺寸

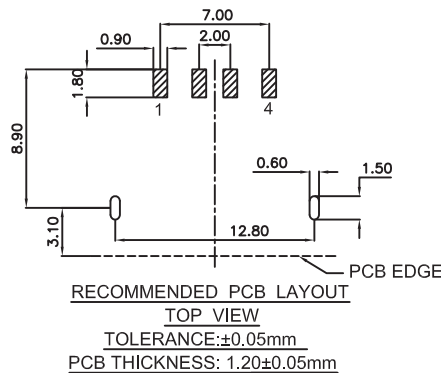

NOTE:
SPECIFICATION:

- 1).Voltage Current Rating: 2.4A,12VDC
- 2).Initial Insulation Resistance: 1000m Ω Min.
- 3).Initial Contact Resistance: 30m Ω Max.
- 4).Dielectric Withstanding Voltage: 500V AC
- 5).Temperature Rating: -20°C to +85°C
- 6).Resistance to solder heat(under PCB) 260°C±5°C, 5 Sec in Wave Solder
- 7).Salt Spray: 35±1°C for 24 hours.

MECHANICAL:

- 1).Mating Force: 3.57kgf(35N) Max.
- 2).Unmating Force: 1.02kgf(10N) Min.
- 3).Durability: 5000 Cycles

△			
△			
△			
△			
△			
SYM	DISCRIPTION	DATE	APPROVED



TACLEX

TACLEX ELECTRONICS CO., LTD.

TOLERANCES UNLESS OTHERWISE SPECIFIED
LINEAR:±0.30 ANGULAR: ±3°

SIGNATURES

DATE

TITLE

USB A TYPE SMT

REVISIONS
A



SCALE
5/1

APPV'D

Rex

2017.4.21

2017.4.21

2017.4.21

NO.

TUA-S10F2M