





NO.	NAME	MATERIAL	FINISH
1	Housing	Nylon PA9T UL94V-0	
2	Terminal	Phosphor BronzeC5191	Gold & Tin Plated
3	Shell	SUS 430	Ni Plated

TUA - S10F1M W - A M * S4 - 1 2

Series _____
 Type _____
 Color _____
 W : White

Shell
 S4 : Nickel Plated
 Version
 0 : Gold Flash
 2 : 30u"

Material
 A : High-Thermoplastic

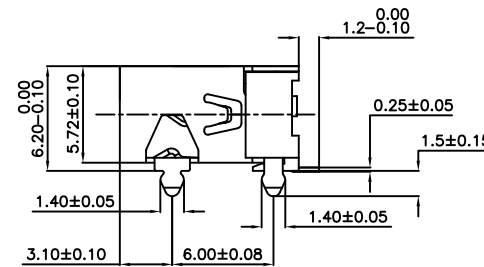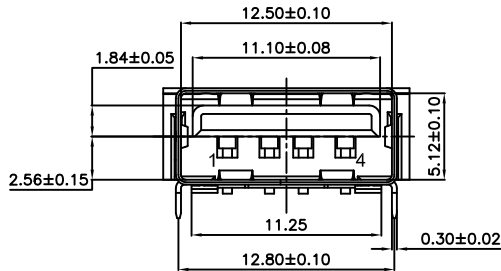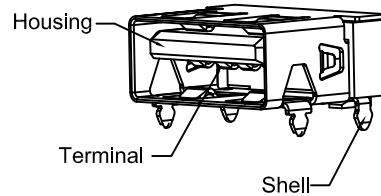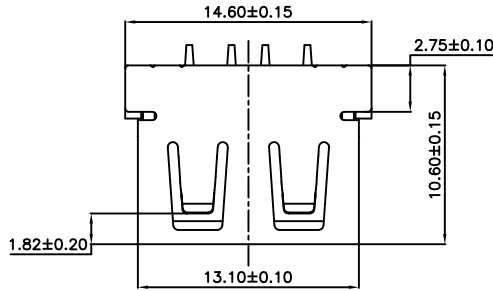



NOTE:

SPECIFICATION:

- 1).Voltage Current Rating: 1A,30VDC
- 2).Initial Insulation Resistance: 1000m Ω Min.
- 3).Initial Contact Resistance: 30m Ω Max.
- 4).Dielectric Withstanding Voltage: 500V AC
- 5).Temperature Rating: -20°C to +85°C
- 6).Resistance to solder heat(under PCB)
260°C±5°C, 5 Sec in Wave Solder

MECHANICAL:

- 1).Mating Force: 3.57kgf(35N) Max.
- 2).Unmating Force: 1.02kgf(10N) Min.
- 3).Durability: 1500 Cycles

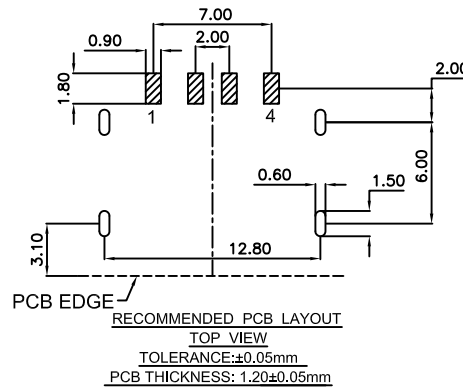

△			
△			
△			
△			
△			
SYM	DISCIPTION	DATE	APPROVED



TACLEX

TACLEX ELECTRONICS CO., LTD.

TOLERANCES UNLESS
 OTHERWISE SPECIFIED
 LINEAR: ±0.30 ANGULAR: ±3°

SIGNATURES

DATE

TITLE

DRAWN

Alex

2015.1.27

USB A TYPE SMT

CHK'D

Andy

2015.1.27

NO.

REVISIONS

A



SCALE

5/1

APPV'D

Rex

2015.1.27

TUA-S10F1MW-AMOS4-12