
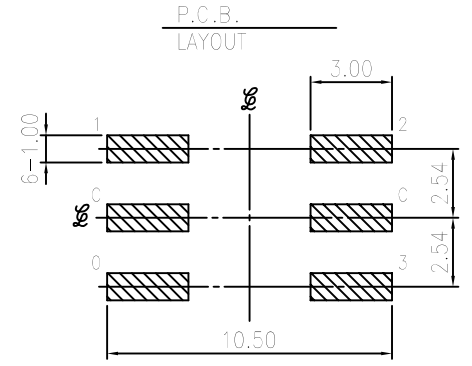




- SPECIFICATIONS:
1. MAXIMUM RATING: 50VDC, 100mA.
  2. MINIMUM RATING: 20VDC, 1μA.
  3. CONTACT RESISTANCE: 100mΩ MAX.
  4. INSULATION RESISTANCE: 100VDC-1000MΩ MIN.
  5. WITHSTAND VOLTAGE: 250VAC-1 MINUTE
  6. ROTARY TORQUE: 40~200gf.cm
  7. TOTAL ROTARY ANGLE: 360° (4 STEPS)
  8. LIFE CYCLE: 10,000 STEPS

**CIRCUIT CHART**

POSITIONS	CODE			
	0	1	2	3
1	●	●		
2	●		●	
3	●			●

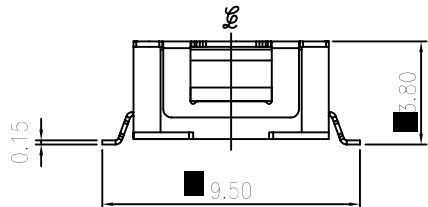

HATCHED AREA SHOW SOLDERING LAND


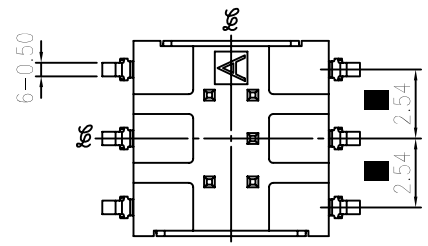


NO.	PART NAME	MATERIAL	Q'TY	FINISHING
1	FRAME	PA+G	1	
2	COVER	SUS	1	
3	ROTOR	LCP+G	1	
4	TERMINAL	PBS	6	Au PLATED
5	CONTACT	BeCu	1	Au PLATED
6	O-RING	SILICONE RUBBER	1	
7	SPACER	SUS	1	

**TACLEX ELECTRONICS CO., LTD.**

TOLERANCES UNLESS OTHERWISE SPECIFIED LINEAR: ±0.30 ANGULAR: ±3'	SIGNATURES	DATE	TITLE
	DRAWN		ROTARY SWITCH
REVISIONS	CHK'D		NO.
A	APPV'D		RSC-14RM



△			
△			
△			
△			
△			
SYM	DISCRIPTION	DATE	APPROVED

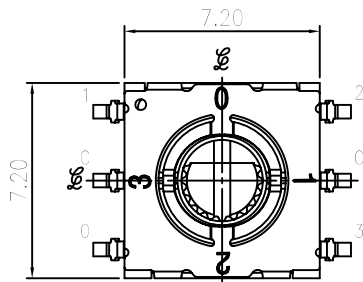


- SPECIFICATIONS:
1. MAXIMUM RATING: 50VDC, 100mA.
  2. MINIMUM RATING: 20VDC, 1μA.
  3. CONTACT RESISTANCE: 100mΩ MAX.
  4. INSULATION RESISTANCE: 100VDC-1000MΩ MIN.
  5. WITHSTAND VOLTAGE: 250VAC-1 MINUTE
  6. ROTARY TORQUE: 40~200gf.cm
  7. TOTAL ROTARY ANGLE: 360° (4 STEPS)
  8. LIFE CYCLE: 10,000 STEPS

**CIRCUIT CHART**


POSITIONS	CODE			
	C	0	1	2
1	●	●		
2	●		●	
3	●			●

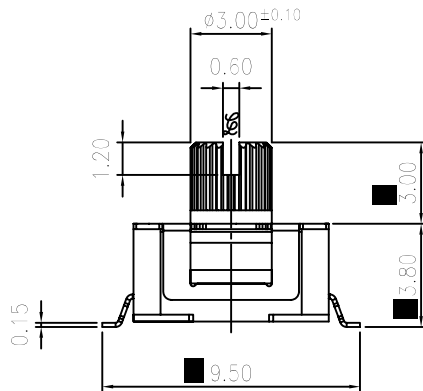

P.C.B. LAYOUT

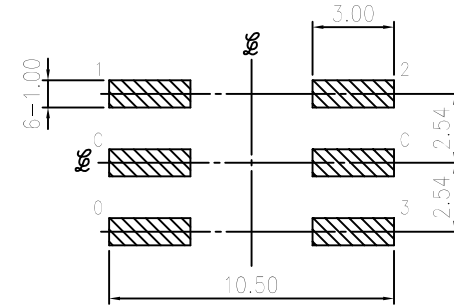

HATCHED AREA SHOW SOLDERING LAND


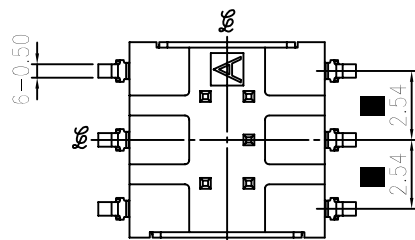


NO.	PART NAME	MATERIAL	Q'TY	FINISHING
1	FRAME	PA+G	1	
2	COVER	SUS	1	
3	ROTOR	LCP+G	1	
4	TERMINAL	PBS	6	Au PLATED
5	CONTACT	BeCu	1	Au PLATED
6	O-RING	SILICONE RUBBER	1	
7	SPACER	SUS	1	

**TACLEX ELECTRONICS CO., LTD.**

TOLERANCES UNLESS OTHERWISE SPECIFIED LINEAR: ±0.30 ANGULAR: ±3'	SIGNATURES	DATE	TITLE
	DRAWN		ROTARY SWITCH
REVISIONS	CHK'D		NO.
A	APPV'D		RSC-24RM




△			
△			
△			
△			
△			
SYM	DISCRIPTION	DATE	APPROVED

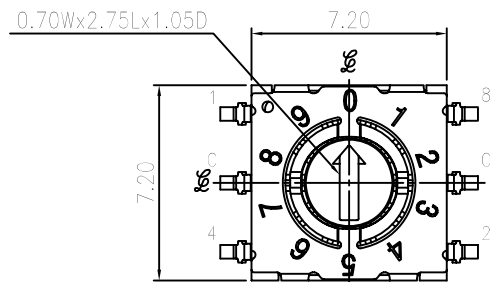


- SPECIFICATIONS:
1. MAXIMUM RATING: 50VDC, 100mA.
  2. MINIMUM RATING: 20VDC, 1μA.
  3. CONTACT RESISTANCE: 100mΩ MAX.
  4. INSULATION RESISTANCE: 100VDC-1000MΩ MIN.
  5. WITHSTAND VOLTAGE: 250VAC-1 MINUTE
  6. ROTARY TORQUE: 40~200gf.cm
  7. TOTAL ROTARY ANGLE: 360° (10 STEPS)
  8. LIFE CYCLE: 10,000 STEPS

**CIRCUIT CHART**

POSITIONS	CODE				
	C	1	2	4	8
0	●				
1	●	●			
2	●	●	●		
3	●	●	●	●	
4	●	●	●	●	●
5	●	●	●	●	●
6	●	●	●	●	●
7	●	●	●	●	●
8	●	●	●	●	●
9	●	●	●	●	●

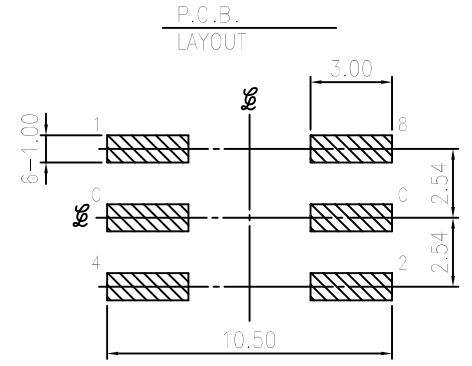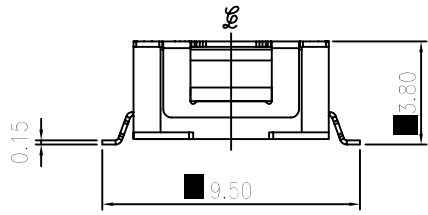

HATCHED AREA SHOW SOLDERING LAND


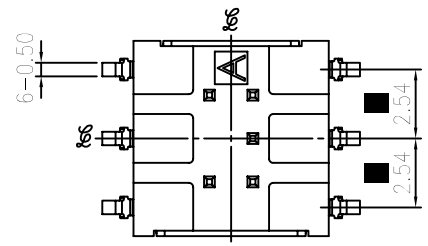


NO.	PART NAME	MATERIAL	Q'TY	FINISHING
1	FRAME	PA+G	1	
2	COVER	SUS	1	
3	ROTOR	LCP+G	1	
4	TERMINAL	PBS	6	Au PLATED
5	CONTACT	BeCu	1	Au PLATED
6	O-RING	SILICONE RUBBER	1	
7	SPACER	SUS	1	

**TACLEX ELECTRONICS CO., LTD.**

TOLERANCES UNLESS OTHERWISE SPECIFIED LINEAR: ±0.30 ANGULAR: ±3'	SIGNATURES	DATE	TITLE
	DRAWN		ROTARY SWITCH
REVISIONS	CHK'D		NO.
A	APPV'D		RSC-1ARM





SYM	DISCRIPTION	DATE	APPROVED
△			
△			
△			
△			

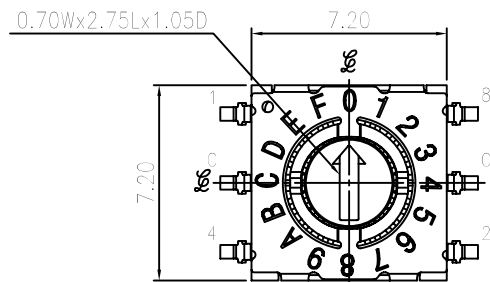

- SPECIFICATIONS:
1. MAXIMUM RATING: 50VDC, 100mA.
  2. MINIMUM RATING: 20VDC, 1μA.
  3. CONTACT RESISTANCE: 100mΩ MAX.
  4. INSULATION RESISTANCE: 100VDC-1000MΩ MIN.
  5. WITHSTAND VOLTAGE: 250VAC-1 MINUTE
  6. ROTARY TORQUE: 40~200gf.cm
  7. TOTAL ROTARY ANGLE: 360° (16 STEPS)
  8. LIFE CYCLE: 10,000 STEPS

**CIRCUIT CHART**

POSITIONS	CODE				
	C	1	2	4	8
0	●				
1	●	●			
2		●	●		
3			●	●	
4	●			●	●
5	●	●	●	●	●
6	●		●	●	●
7	●	●	●	●	●
8	●				
9	●	●			
A	●		●		
B	●	●	●		
C	●			●	●
D	●	●	●	●	●
E	●				
F	●	●			

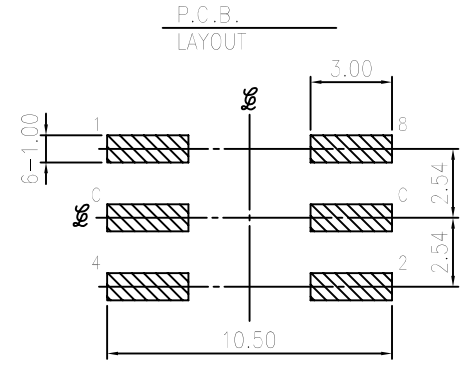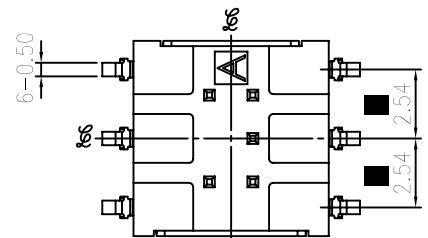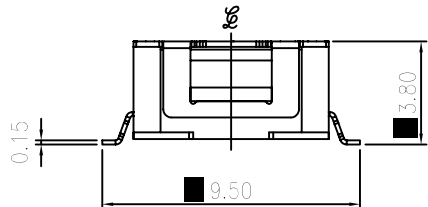



HATCHED AREA SHOW SOLDERING LAND

NO.	PART NAME	MATERIAL	Q'TY	FINISHING
1	FRAME	PA+G	1	
2	COVER	SUS	1	
3	ROTOR	LCP+G	1	
4	TERMINAL	PBS	6	Au PLATED
5	CONTACT	BeCu	1	Au PLATED
6	O-RING	SILICONE RUBBER	1	
7	SPACER	SUS	1	

**TACLEX ELECTRONICS CO., LTD.**

△			
△			
△			
△			
△			
SYM	DISCRIPTION	DATE	APPROVED



TOLERANCES UNLESS OTHERWISE SPECIFIED LINEAR: ±0.30 ANGULAR: ±3'	SIGNATURES	DATE	TITLE
	DRAWN		ROTARY SWITCH
REVISIONS	SCALE	CHK'D	NO.
A	5/1	APPV'D	RSC-1FRM

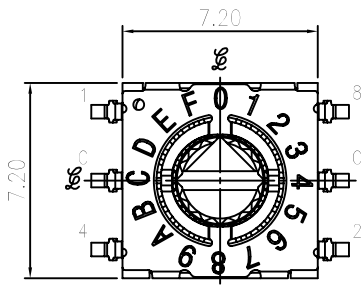


- SPECIFICATIONS:
1. MAXIMUM RATING: 50VDC, 100mA.
  2. MINIMUM RATING: 20VDC, 1μA.
  3. CONTACT RESISTANCE: 100Ω MAX.
  4. INSULATION RESISTANCE: 100VDC-1000Ω MIN.
  5. WITHSTAND VOLTAGE: 250VAC-1 MINUTE
  6. ROTARY TORQUE: 40~200gf.cm
  7. TOTAL ROTARY ANGLE: 360° (16 STEPS)
  8. LIFE CYCLE: 10,000 STEPS

**CIRCUIT CHART**


POSITIONS	CODE				
	C	1	2	4	8
0	●	●			
1	●				
2		●			
3			●		
4	●			●	
5	●	●		●	●
6	●		●	●	
7	●	●	●	●	
8	●				●
9	●				●
A	●		●		
B	●	●			
C	●			●	
D	●	●	●	●	
E	●				●
F	●				●

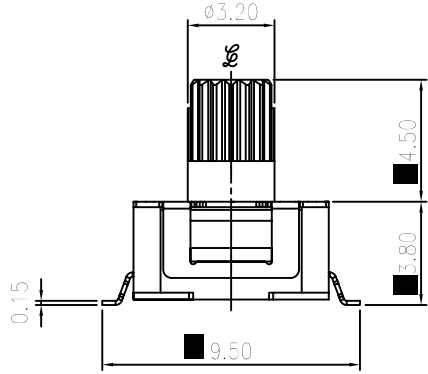

P.C.B. LAYOUT

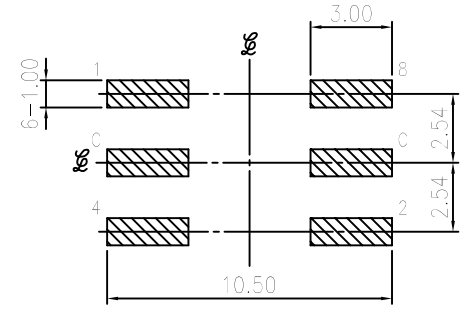

HATCHED AREA SHOW SOLDERING LAND

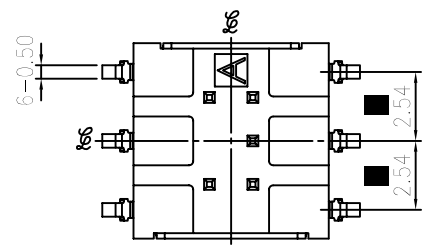




NO.	PART NAME	MATERIAL	Q'TY	FINISHING
1	FRAME	PA+G	1	
2	COVER	SUS	1	
3	ROTOR	LCP+G	1	
4	TERMINAL	PBS	6	Au PLATED
5	CONTACT	BeCu	1	Au PLATED
6	O-RING	SILICONE RUBBER	1	
7	SPACER	SUS	1	

**TACLEX ELECTRONICS CO., LTD.**

△			
△			
△			
△			
△			
SYM	DISCRIPTION	DATE	APPROVED

TOLERANCES UNLESS OTHERWISE SPECIFIED LINEAR: ±0.30 ANGULAR: ±3'	SIGNATURES	DATE	TITLE
	DRAWN		ROTARY SWITCH
REVISIONS	CHK'D		NO.
A	APPV'D		RSC-3FRM


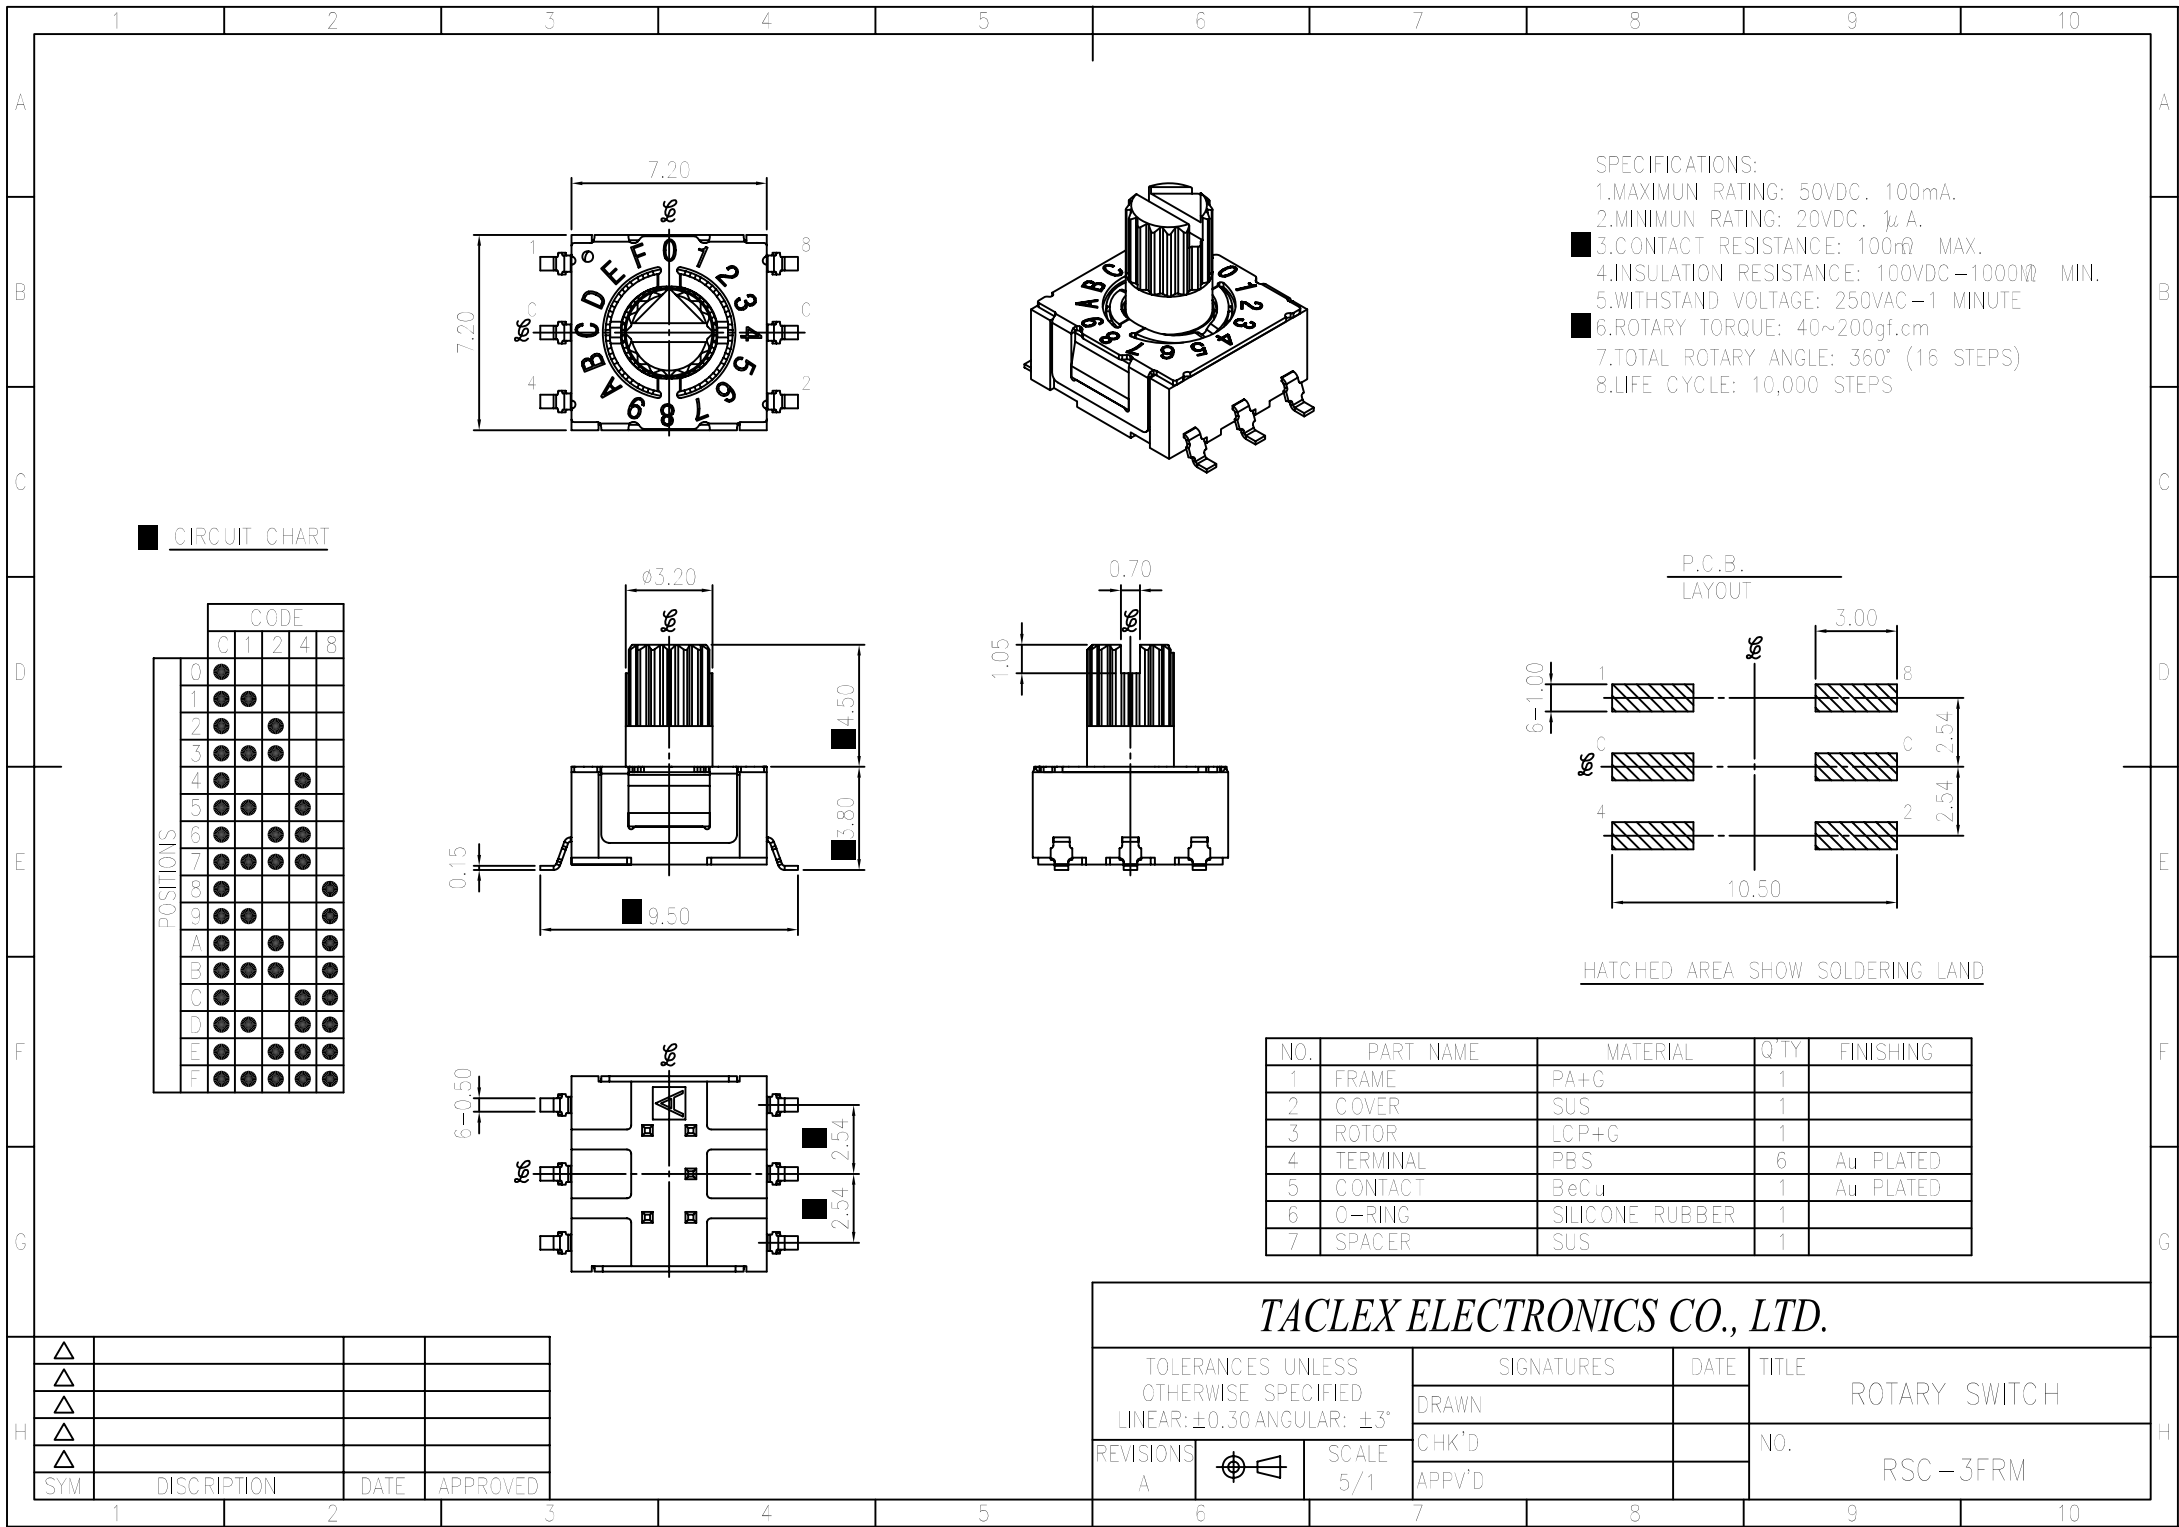


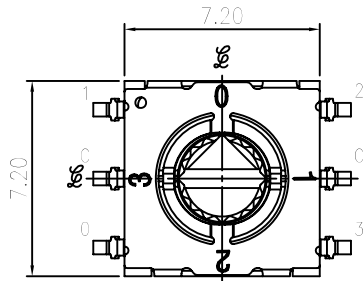


- SPECIFICATIONS:
1. MAXIMUM RATING: 50VDC, 100mA.
  2. MINIMUM RATING: 20VDC, 1μA.
  3. CONTACT RESISTANCE: 100Ω MAX.
  4. INSULATION RESISTANCE: 100VDC-1000Ω MIN.
  5. WITHSTAND VOLTAGE: 250VAC-1 MINUTE
  6. ROTARY TORQUE: 40~200gf.cm
  7. TOTAL ROTARY ANGLE: 360° (4 STEPS)
  8. LIFE CYCLE: 10,000 STEPS

**CIRCUIT CHART**


POSITIONS	CODE				
	C	0	1	2	3
1	●	●			
2	●		●		
3	●			●	

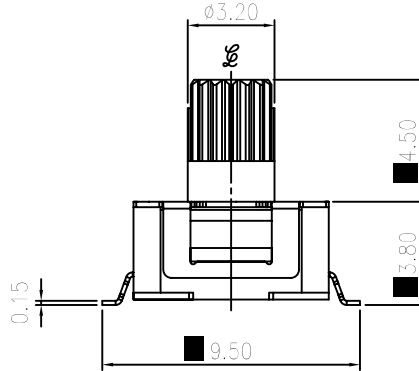

P.C.B. LAYOUT

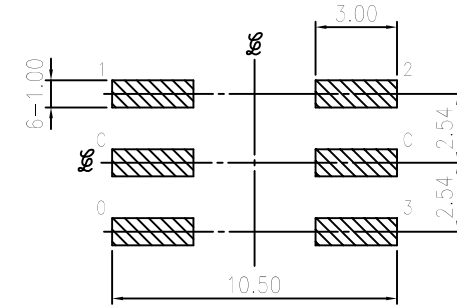

HATCHED AREA SHOW SOLDERING LAND


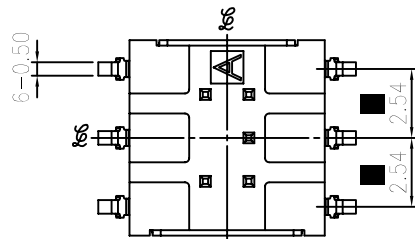


NO.	PART NAME	MATERIAL	Q'TY	FINISHING
1	FRAME	PA+G	1	
2	COVER	SUS	1	
3	ROTOR	LCP+G	1	
4	TERMINAL	PBS	6	Au PLATED
5	CONTACT	BeCu	1	Au PLATED
6	O-RING	SILICONE RUBBER	1	
7	SPACER	SUS	1	

**TACLEX ELECTRONICS CO., LTD.**

TOLERANCES UNLESS OTHERWISE SPECIFIED LINEAR: ±0.30 ANGULAR: ±3'	SIGNATURES	DATE	TITLE
	DRAWN		ROTARY SWITCH
REVISIONS	CHK'D		NO.
A	APPV'D		RSC-34RM



△			
△			
△			
△			
△			
SYM	DISCRIPTION	DATE	APPROVED

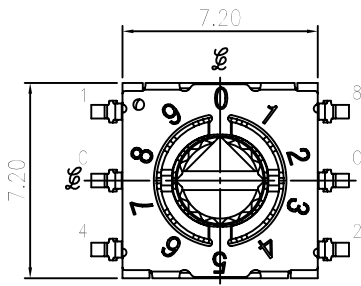


- SPECIFICATIONS:
1. MAXIMUM RATING: 50VDC, 100mA.
  2. MINIMUM RATING: 20VDC, 1μA.
  3. CONTACT RESISTANCE: 100Ω MAX.
  4. INSULATION RESISTANCE: 100VDC-1000Ω MIN.
  5. WITHSTAND VOLTAGE: 250VAC-1 MINUTE
  6. ROTARY TORQUE: 40~200gf.cm
  7. TOTAL ROTARY ANGLE: 360° (10 STEPS)
  8. LIFE CYCLE: 10,000 STEPS

**CIRCUIT CHART**


POSITIONS	CODE				
	C	1	2	4	8
0					
1	●				
2	●	●			
3	●	●	●		
4	●	●	●	●	
5	●	●	●	●	●
6	●	●	●	●	●
7	●	●	●	●	●
8	●	●	●	●	●
9	●	●	●	●	●

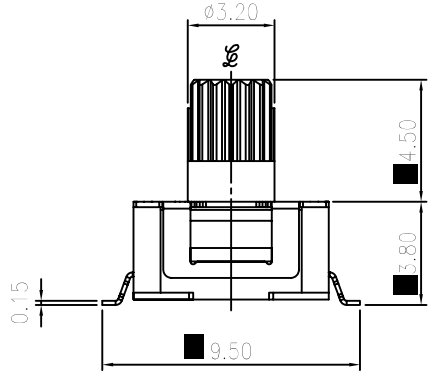

**P.C.B. LAYOUT**

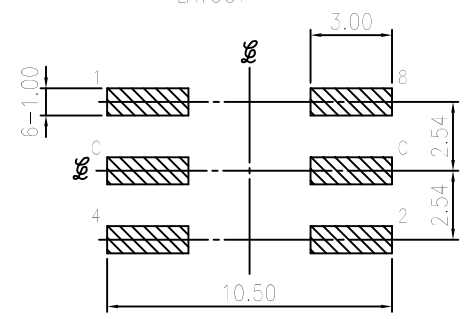

HATCHED AREA SHOW SOLDERING LAND

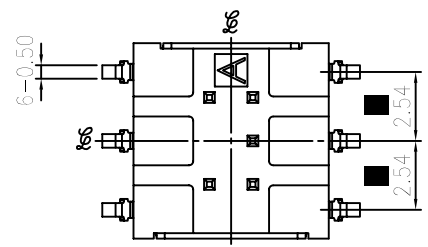

NO.	PART NAME	MATERIAL	Q'TY	FINISHING
1	FRAME	PA+G	1	
2	COVER	SUS	1	
3	ROTOR	LCP+G	1	
4	TERMINAL	PBS	6	Au PLATED
5	CONTACT	BeCu	1	Au PLATED
6	O-RING	SILICONE RUBBER	1	
7	SPACER	SUS	1	

**TACLEX ELECTRONICS CO., LTD.**

TOLERANCES UNLESS OTHERWISE SPECIFIED LINEAR: ±0.30 ANGULAR: ±3'	SIGNATURES	DATE	TITLE
	DRAWN		ROTARY SWITCH
REVISIONS	CHK'D		NO.
A	APPV'D		RSC-3ARM

△			
△			
△			
△			
△			
SYM	DISCRIPTION	DATE	APPROVED