







5	Top Contact	Copper Alloy	Contact Area: Gold Plated Solder Area: Tin Plated
4	Bottom Contact	Copper Alloy	Contact Area: Gold Plated Solder Area: Tin Plated
3	Bottom Insulator	High-Thermoplastic	
2	Top Insulator	High-Thermoplastic	
1	Shell	Copper Alloy	Nickel Plated
NO.	NAME	MATERIAL	PLATING




DETAIL A
SCALE: 2:1



THD-S60M2 B - L * H - T R

Series _____ Tape & Reel
 Type _____ Shell
 Color _____ H : Nickel Plated
 B : Black
 Material _____ Gold Plated
 L : LCP 0 : Gold Flash
 1 : 5u"
 2 : 15u"
 3 : 30u"

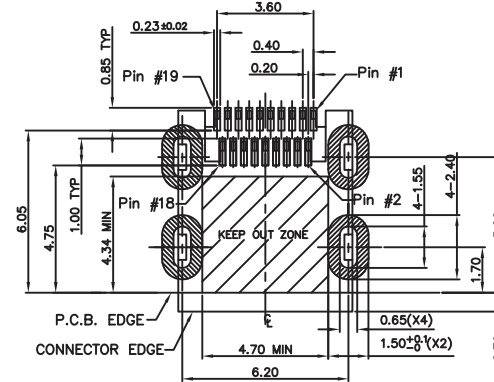

RECOMMENDED PCB LAYOUT
 TOP VIEW
 TOLERANCE: ±0.05mm
 PCB THICKNESS: 0.80±0.05mm

△			
△			
△			
△			
△			
SYM	DISCRIPTION	DATE	APPROVED



TACLEX ELECTRONICS CO., LTD.

TOLERANCES UNLESS OTHERWISE SPECIFIED LINEAR: ±0.30 ANGULAR: ±3°	SIGNATURES		DATE	TITLE
	DRAWN	Alex	2008.11.05	HDMI Receptacle, Type D, SMT
	CHK'D	Andy	2008.11.05	
REVISIONS	SCALE 1 : 1	APPV'D	Rex	NO. THD-S60M2
A				