
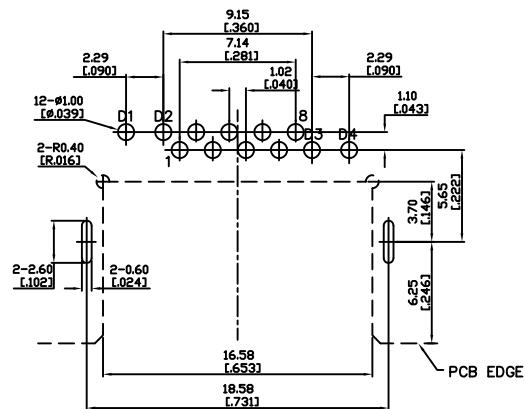
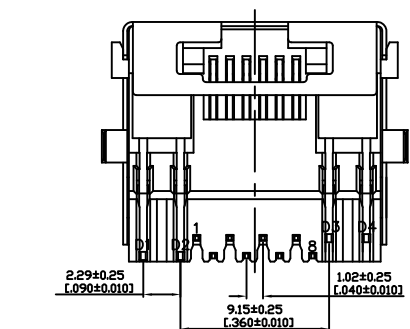

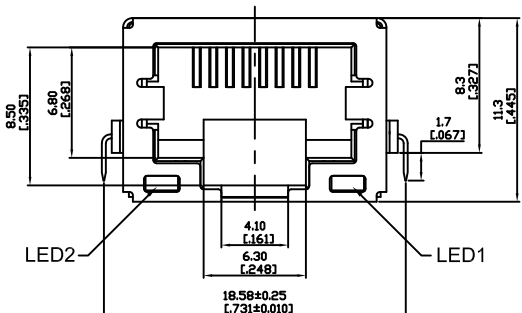
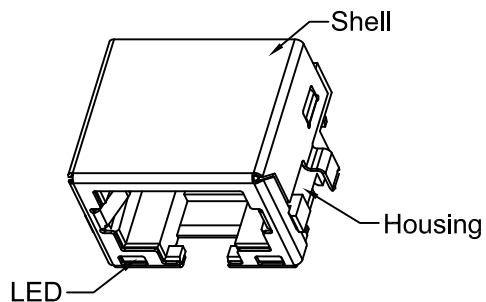


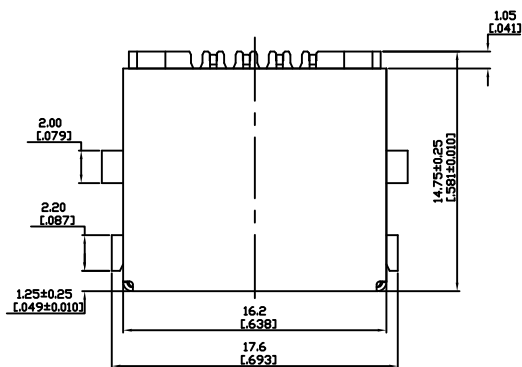

RECOMMENDED PCB LAYOUT
TOP VIEW
PCB THICKNESS: 1.60±0.05mm
TOLERANCE: ±0.05mm

Electrical Characteristics :

Insulation Resistance : 100MΩMin.

Contact Resistance : 50mΩ Max.

Withstand Voltage : 1000 VAC 1 minute.

Current Rating : 1.5A

Material:

Housing : High-Thermoplastic UL94V-0


Contact : Selective Gold Plating

Terminal: 0.30mm Thickness Copper Alloy

Plated With Gold And Tin In Solder Area.

Shell : Alloy,Nickel Plated On The All Area

PART NO : HA88K2-B*1*-TR

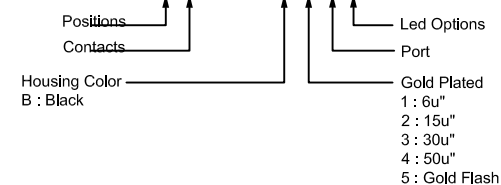

LED Color Options Table

LED Color Options		LED DASH OPTION
LED 2 (Left)	LED 1 (Right)	
Yellow	Green	1
No LED	Green	2
Yellow	No LED	3
Green	Yellow	4
Green	Green	5
Yellow	Yellow	6
Orange/Green	Orange/Green	7
Yellow/Green	Yellow/Green	8
Orange/Green	Yellow	9

△			
△			
△			
△			
△			
SYM	DISCRIPTION	DATE	APPROVED
1			
2			
3			



TACLEX

TACLEX ELECTRONICS CO., LTD.

TOLERANCE (公差) :
0.000 mm ± 0.075 mm
0.00 mm - 0.15 mm
0.0 mm ± 0.25 mm

SIGNATURES

DATE

TITLE RJ45,Shielded,Receptacle,Horizontal
Single Port,Tht,With LED

DRAWN Alex

2015.10.12

CHK'D Andy

2015.10.12

APPV'D Rex

2015.10.12

NO. HA88K2-B*1*-TR

REVISIONS

A

1:1

SCALE

1:1

1

2

3

4

5

6

7

8

9

10