





Electrical Characteristics :
 Insulation Resistance : 100MΩ Min.
 Contact Resistance : 50mΩ Max.
 Withstand Voltage : 1000 VAC 1 minute.
 Current Rating : 1.5A

Material:
 Housing: Thermoplastic UL 94V-0
 Terminal: 0.25mm Thickness Copper Alloy
 Plated With Gold And Tin In Solder Area.
 Shell: Alloy

PART NO : HA 8 8 K 4 - B * 1 *


Positions →
 Contacts →
 Housing Color →
 B : Black

Led Options
 Ports →
 Gold Plated
 1 : 6u"
 2 : 15u"
 3 : 30u"
 4 : 50u"
 5 : Gold Flash

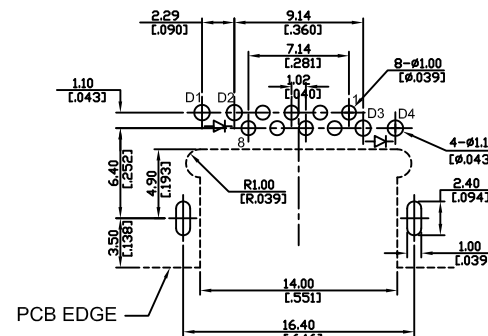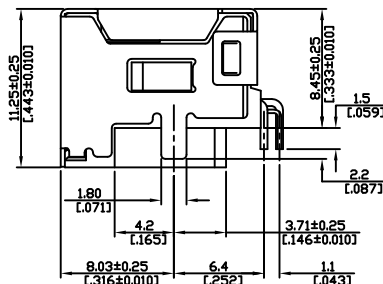

RECOMMENDED PCB LAYOUT
TOP VIEW
 TOLERANCE: ±0.03mm
 PCB THICKNESS: 1.20±0.05mm

LED Color Options Table		
LED 2 (Left)	LED 1 (Right)	LED DASH OPTION
Yellow	Green	1
No LED	Green	2
Yellow	No LED	3
Green	Yellow	4
Green	Green	5
Yellow	Yellow	6
Orange/Green	Orange/Green	7
Yellow/Green	Yellow/Green	8
Orange/Green	Yellow	9

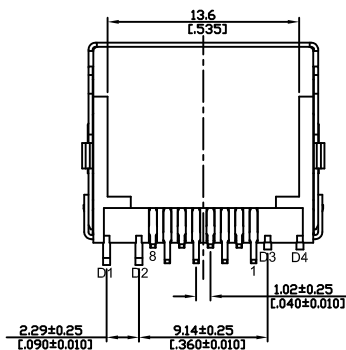

△			
△			
△			
△			
△			
SYM	DISCRIPTION	DATE	APPROVED



TACLEX

TACLEX ELECTRONICS CO., LTD.

TOLERANCES UNLESS
 OTHERWISE SPECIFIED
 LINEAR: ±0.30 ANGULAR: ±3°

REVISIONS
 A



SCALE
 1:1

SIGNATURES

DRAWN 賴振通

CHK'D 游海濤

APPV'D Rex

DATE

2012.10.25

2012.10.25

2014.05.30

TITLE

RJ45, 8P8C, With LED

NO.

KA88K4-Bx1x