
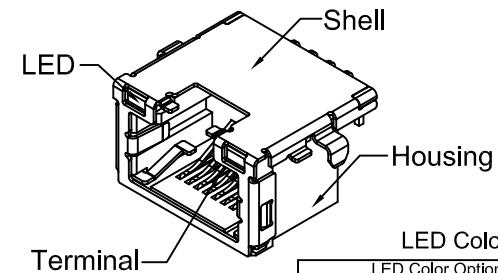


RECOMMENDED PCB LAYOUT
TOP VIEW
TOLERANCE:±0.05mm
PCB THICKNESS: 1.60±0.05mm

Electrical Characteristics :
Insulation Resistance : 500MΩ Min.
Contact Resistance : 50mΩ Max.
Withstand Voltage : 1000 VAC 1 minute.
Current Rating : 1.5A

Material:
Housing: Thermoplastic UL 94V-0
Contact : Selective Gold Plating
Terminal: 0.25mm Thickness Copper Alloy
Plated With Gold And Tin In Solder Area.
Shell: Alloy ,Nickel Plating
Fork:Alloy

PART NO : HA 8 8 KB1 - B * 1 * - T R

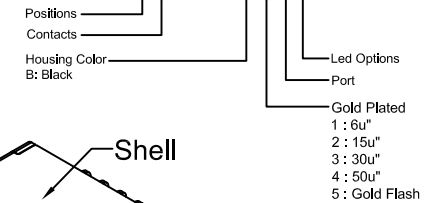

LED Color Options Table

LED Color Options		LED DASH OPTION
LED 2 (Left)	LED 1 (Right)	
Yellow	Green	1
No LED	Green	2
Yellow	No LED	3
Green	Yellow	4
Green	Green	5
Yellow	Yellow	6
Orange/Green	Orange/Green	7
Yellow/Green	Yellow/Green	8
Orange/Green	Yellow	9



泰立電子有限公司

TACLEX ELECTRONICS CO., LTD.

ZONE	REV.	DESCRIPTION	DATE	DWG.	FILE NO :HA (SERIES)	TITLE 圖名	RJ45,Shielded,Receptacle, Horizontal,Single Port,Tht		UNIT 單位	mm inch	
					TOLERANCE(公差): 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm	PART NO. 料號	HA88KB1-B*1*-TR		SCALE 比例	1 : 1	
						DRAWN BY 製圖	Lisa	DATE 日期	2017-11-02	REV. 版本	A.0
						CHECKED BY 審核	Jay	DATE 日期	2017-11-02		