
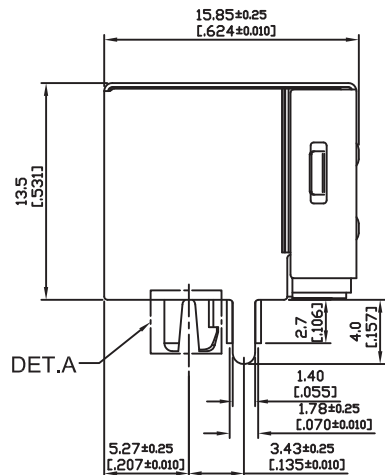
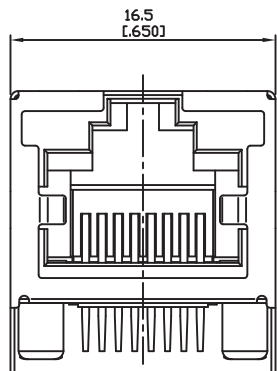
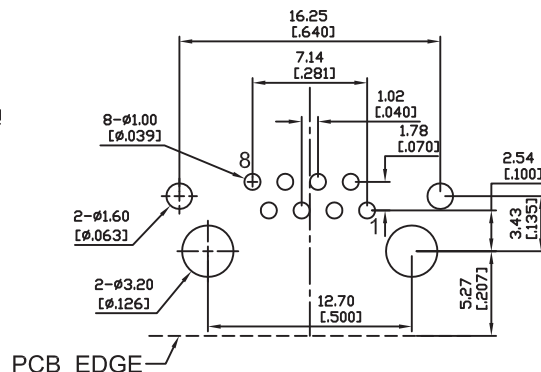


DET.A
SCALE 2:1

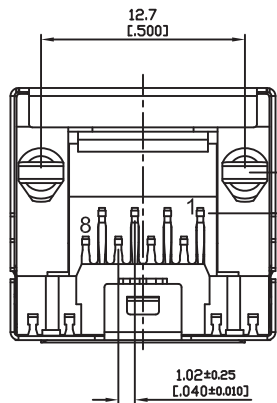


RECOMMENDED PCB LAYOUT
TOP VIEW
TOLERANCE:±0.05mm
PCB THICKNESS: 1.60±0.05mm

Electrical Characteristics :
Insulation Resistance : 500MΩ Min.
Contact Resistance : 50mΩ Max.
Withstand Voltage : 1000 VAC 1 minute.
Current Rating : 1.5A

Material:
Housing: Thermoplastic UL94V-0
Contact : Selective Gold Plating
Terminal: 0.35mm Thickness Copper Alloy
Plated With Gold And Tin In Solder Area.
Shell: Copper Alloy ,Nickel Plating

PART NO : HA 8 8 D - B * 1 0 - 0 0 2 0 0

Positions
Contacts
Housing Color
B : Black
No Led
Port
Gold Plated
1 : 6u"
2 : 15u"
3 : 30u"
4 : 50u"
5 : Gold Flash

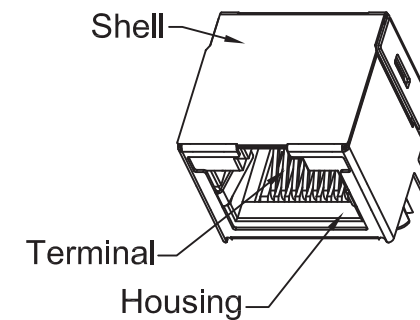

△			
△			
△			
△			
△			
SYM	DISCRIPTION	DATE	APPROVED



TACLEX

TACLEX ELECTRONICS CO., LTD.

TOLERANCE(公差):
0.000 mm ± 0.075 mm
0.00 mm ± 0.15 mm
0.0 mm ± 0.25 mm

REVISIONS
A.0



SCALE
1:1

SIGNATURES

DATE

TITLE RJ45,Shielded,Receptacle,
Horizontal.Single Port.Tht

DRAWN Alex

2014-02-10

CHK'D Andy

2014-02-10

APPV'D Rex

2014-02-10

NO. HA88D-B * 10-00200