
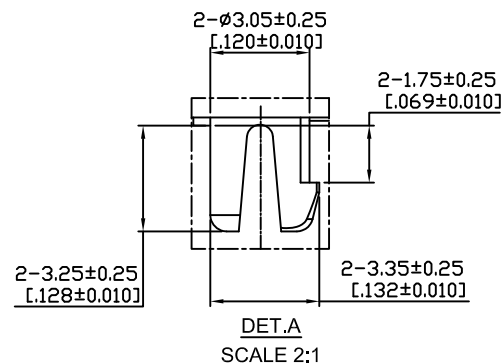
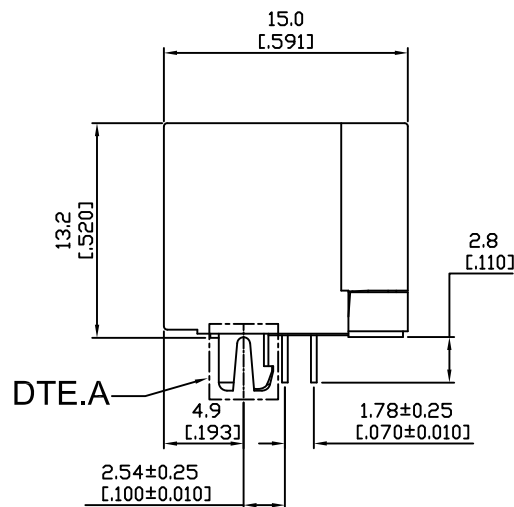




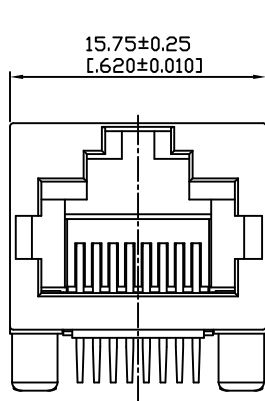


Electrical Characteristics :
 Insulation Resistance : 500MΩ Min.
 Contact Resistance : 50mΩ Max.
 Withstand Voltage : 1000 VAC 1 minute.
 Current Rating : 1.5A

Material:
 Housing: Thermoplastic UL94V-0
 Contact : Selective Gold Plating
 Terminal: 0.35mm Thickness Copper Alloy
 Plated With Gold And Tin In Solder Area.
 PART NO : HA88DN-B*10-00200

Positions
 Contacts
 Housing Color
 B : Black

No Led
 Port
 Gold Plated
 1 : 6u"
 2 : 15u"
 3 : 30u"
 4 : 50u"
 5 : Gold Flash

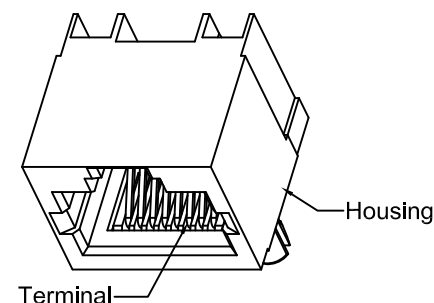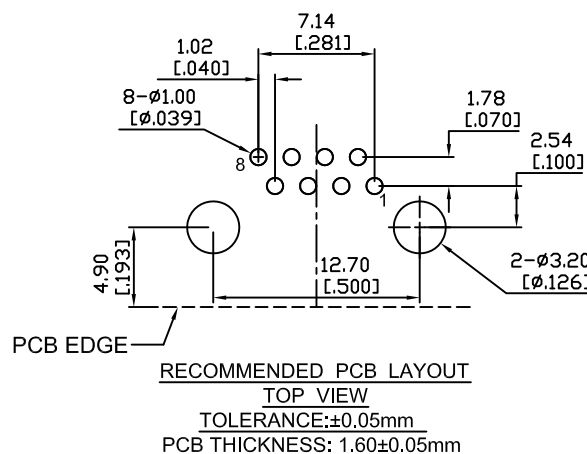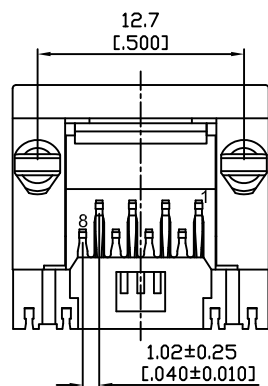

△			
△			
△			
△			
△			
SYM	DISCRIPTION	DATE	APPROVED



TACLEX

TACLEX ELECTRONICS CO., LTD.

TOLERANCES UNLESS OTHERWISE SPECIFIED LINEAR: ±0.30 ANGULAR: ±3°			SIGNATURES		DATE	TITLE RJ45,Unshielded,Receptacle, Horizontal.Single Port.Tht
			DRAWN	Alex	2015.07.08	
			REVISIONS A		SCALE 1/1	CHK'D
APPV'D	Rex	2015.07.08				