
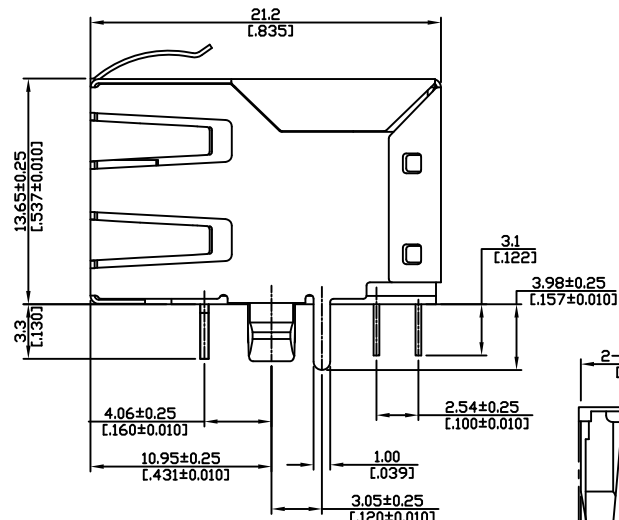
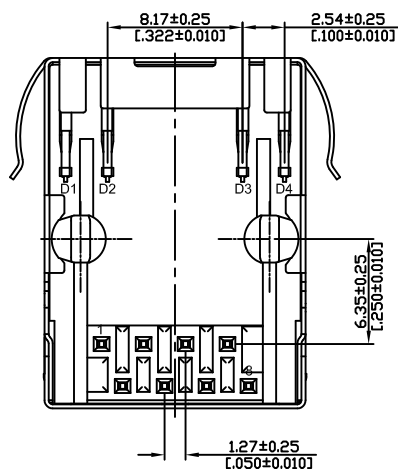
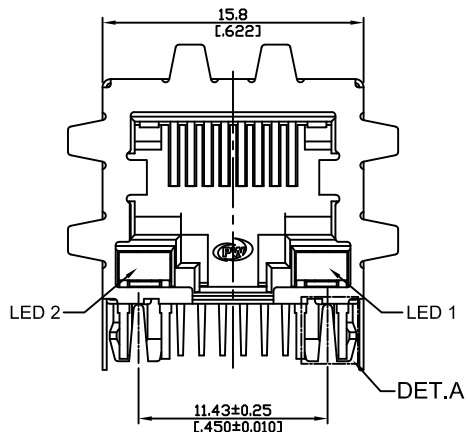


DET.A
SCALE 2:1

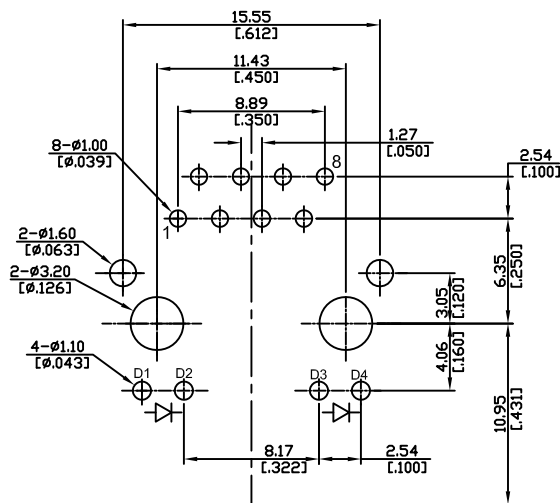


PCB EDGE
RECOMMENDED PCB LAYOUT
TOP VIEW
TOLERANCE:±0.05mm
PCB THICKNESS: 1.60±0.05mm

Electrical Characteristics :
Insulation Resistance : 500MΩ Min.
Contact Resistance : 50mΩ Max.
Withstand Voltage : 1000 VAC 1 minute.
Current Rating : 1.5A
Material:
Housing: Thermoplastic UL94V-0
Contact : Selective Gold Plating
Terminal: 0.35mm Thickness Copper Alloy
Plated With Gold And Tin In Solder Area.
Shell: Copper Alloy, Nickel Plated

Part No.: H A 8 8 D S - B * 1 * - 0 0 B 0 0

Positions
Contacts
Panel Ground
S : 3 Sides With Panel Ground
Housing Color
B : Black
Led Options
Port
Gold Plated
1 : 6u"
2 : 15u"
3 : 30u"
4 : 50u"
5 : Gold Flash

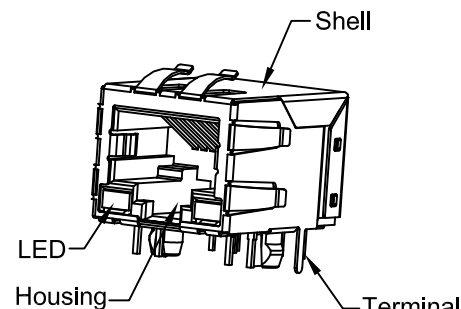

LED Color Options Table

LED Color Options		
LED 2 (Left)	LED 1 (Right)	LED DASH OPTION
Yellow	Green	1
No LED	Green	2
Yellow	No LED	3
Green	Yellow	4
Green	Green	5
Yellow	Yellow	6
Orange/Green	Orange/Green	7
Yellow/Green	Yellow/Green	8
Orange/Green	Yellow	9

△			
△			
△			
△			
△			
SYM	DISCRIPTION	DATE	APPROVED



TACLEX

TACLEX ELECTRONICS CO., LTD.

TOLERANCES UNLESS
OTHERWISE SPECIFIED
LINEAR:±0.30 ANGULAR: ±3°

SIGNATURES

DATE

TITLE

DRAWN

Frank

2014.03.25

RJ45 JACK W/LED DIP

REVISIONS

A

SCALE

5/1

CHK'D

Eric

2014.03.25

NO.

HA88DS-Bx1x-00B00

APPV'D

Rex

2014.03.25