

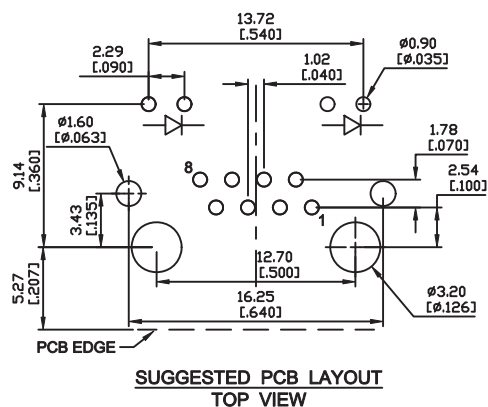
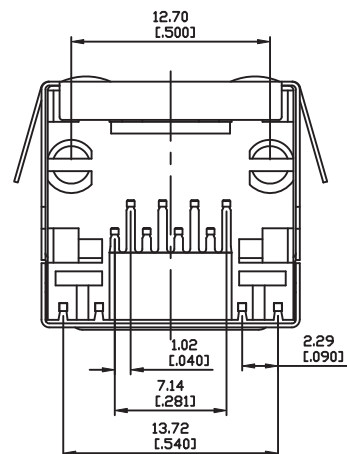
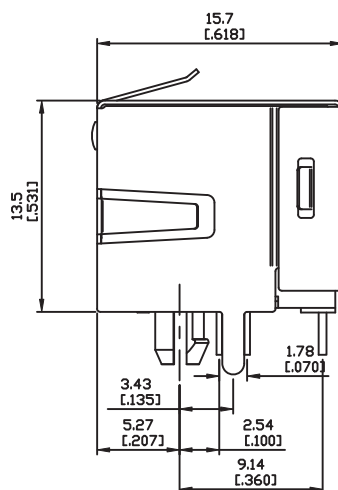


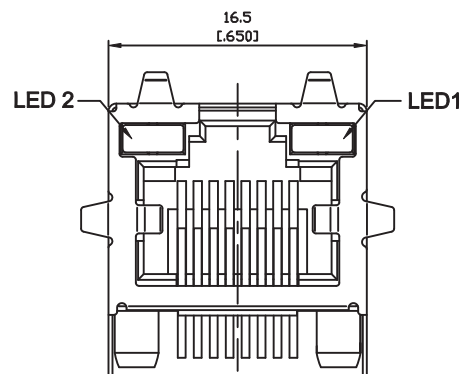

TYPICAL FOR BI-COLOR



TYPICAL FOR SINGLE COLOR

Electrical Characteristics :
Insulation Resistance : 500MΩ Min.
Contact Resistance : 50mΩ Max.
Withstand Voltage : 1000 VAC 1 minute.
Current Rating : 1.5A

Material:

Housing: Thermoplastic UL 94V-0

Contact : Selective Gold Plating

Terminal: 0.35mm Thickness Phosphor Bronze
Plated With Gold And Tin In Solder Area.

Shielded: Brass ,Nickel Plating

CUL File No : E215573

PART NO : HA88S-B*1*

Positions
Contacts
Housing Color
B : Black
Led Options
Ports
Gold Plated
0 : Gold Flash
1 : 6u"
2 : 15u"
3 : 30u"
4 : 50u"

LED Color Options Table

LED Color Options		LED DASH OPTION
LED 2 (Left)	LED 1 (Right)	
No LED	No LED	0
Yellow	Green	1
No LED	Green	2
Yellow	No LED	3
Green	Yellow	4
Green	Green	5
Yellow	Yellow	6
Orange/Green	Orange/Green	7
Yellow/Green	Yellow/Green	8
Orange/Green	Yellow	9
No LED	Green/Yellow	Z
Green	Orange	A
Orange	Green	B
Green	Red	C
Red	Green	D

(A)



泰立電子有限公司

TACLEX ELECTRONICS CO., LTD.

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 81 (SERIES)	TITLE	SHIELDED RJ45 WITH LED PCB JACK		UNIT	mm
(A)	A.1	Withstand Voltage 500修改為1000VAC	2008-08-01	Nick	TOLERANCE (公差): 0.000 mm ± 0.075mm 0.00 mm ± 0.15mm 0.0 mm ± 0.25mm	圖名			單位	inch
(B)						PART NO. 料號	HA88S-B*1*		SCALE 比例	1:1
(C)						REV. 版本	A.1	DATE 日期	2007-02-01	
(D)						CHECKED BY 審核	Michael		DRAWN BY 製圖	
(E)										Valiant