


RECOMMENDED PCB LAYOUT  
TOP VIEW  
TOLERANCE: ±0.05mm  
PCB THICKNESS: 1.60±0.05mm

Electrical Characteristics :  
Insulation Resistance : 500MΩ Min.  
Contact Resistance : 50mΩ Max.  
Withstand Voltage : 1000 VAC 1 minute.  
Current Rating : 1.5A

Material:  
Housing: Thermoplastic UL94V-0  
Contact : Selective Gold Plating  
Terminal: 0.35mm Thickness Copper Alloy  
Plated With Gold And Tin In Solder Area.

PART NO : HA 8 8 P N - B \* 2 0

Positions ———>  
Contacts ———>  
Housing Color ———>  
No Led ———>  
Ports ———>  
Gold Plated  
1 : 6u"  
2 : 15u"  
3 : 30u"  
4 : 50u"  
5 : Gold Flash

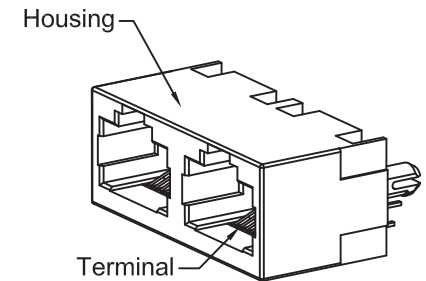

△			
△			
△			
△			
△			
SYM	DISCRIPTION	DATE	APPROVED



TACLEX ELECTRONICS CO., LTD.

TOLERANCES UNLESS OTHERWISE SPECIFIED LINEAR: ±0.30 ANGULAR: ±3°	SIGNATURES		DATE	TITLE
	DRAWN	Alex	2008.11.05	RJ45 , Unshielded , Receptacle, Vertical. 1x2 Ports .Tht
	CHK'D	Andy	2008.11.05	NO.
REVISIONS	SCALE	APPV'D	HA88PN-B*20	
A	5/1	Rex		