

NO.	NAME	MATERIAL	FINISH
1	Housing	High-Thermoplastic	
2	Insert	High-Thermoplastic	
3	Terminal 1	Copper Alloy	Gold-Tin Plated
4	Terminal 2	Copper Alloy	Gold-Tin Plated
5	Shell	Alloy	Nickel Plated
6	Mylar	Polyimide	

TMU -S40ME B- L * E - TMR







Series _____
Type _____
Color _____
B : Black

Housing _____
L : High-Thermoplastic

Package
TMR : Tape & Reel+Mylar

Shell
E : Nickel Plated

Version
1 : 1.1
2 : 2.0

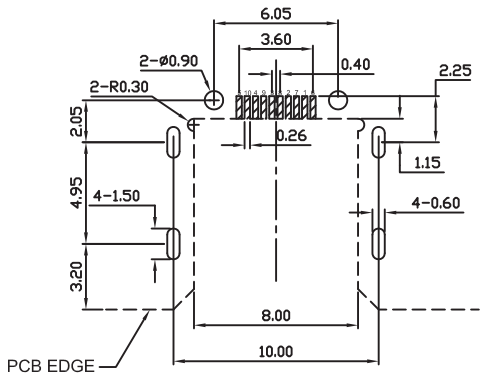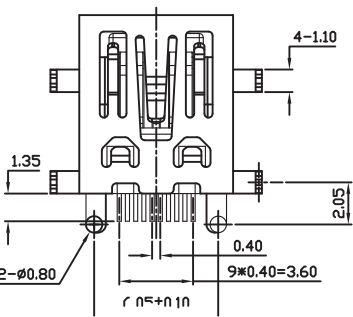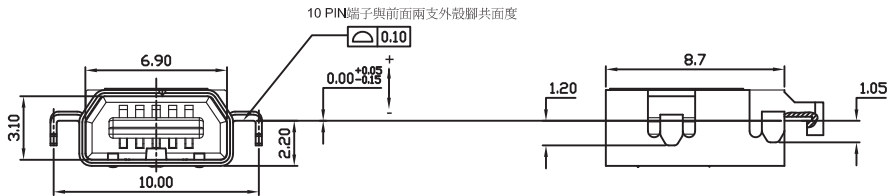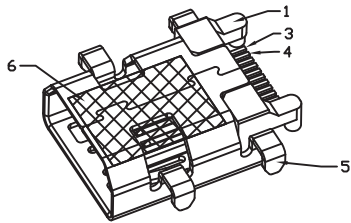

RECOMMENDED PCB LAYOUT
TOP VIEW
TOLERANCE:±0.05mm
PCB THICKNESS: 1.20±0.05mm

△			
△			
△			
△			
△			
SYM	DISCRIPTION	DATE	APPROVED



TACLEX

TACLEX ELECTRONICS CO., LTD.

TOLERANCES UNLESS OTHERWISE SPECIFIED LINEAR:±0.30 ANGULAR: ±3°		SIGNATURES		DATE	TITLE
		DRAWN	Alex	2008.11.05	Mini USB. 10PIN TYPE AB
		CHK'D	Andy	2008.11.05	NO. TMU-S40MEB-L*E-TMR
REVISIONS A		SCALE 5/1	APPV'D Rex	2008.11.05	