

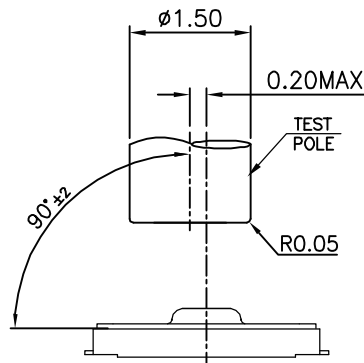
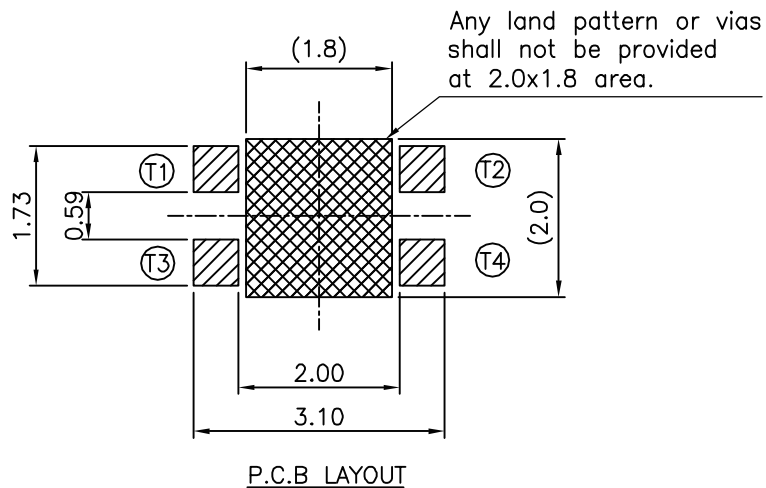
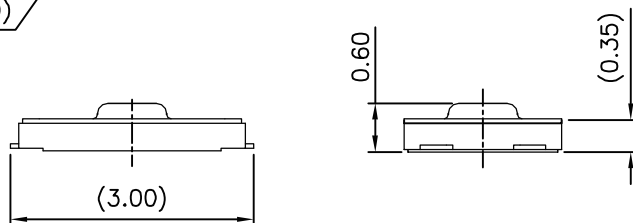


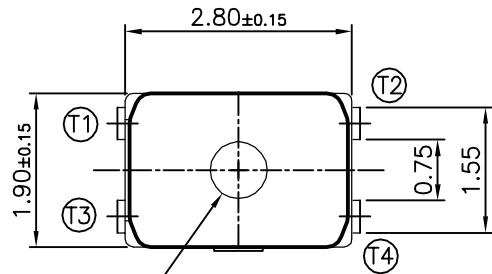


- NOTES:
1. ALL DIMENSIONS ARE IN MILLIMETERS.
 2. GENERAL TOLERANCES $\pm 0.1\text{mm}$.
 3. SOLDER THICKNESS: 0.08mm.

- SPECIFICATIONS:
1. RATING: 50mA, DC 12V.
 2. LIFE: 300,000 STEPS.
 3. OPERATING FORCE: $160 \pm 50\text{gf}$.
 4. INITIAL CONTACT RESISTANCE: 500m Ω Max.
 5. DIELECTRIC STRENGTH: AC 250V 1 MINUTE.
 6. INSULATION RESISTANCE: 100M Ω Min.
 7. OPERATING TEMPERATURE: -40°C to $+85^\circ\text{C}$.

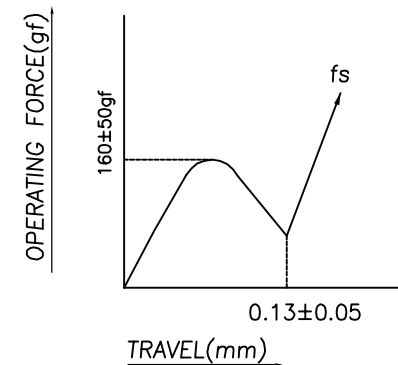

OPERATING FORCE(PUSH)-TRAVEL CHART



△			
△			
△			
△			
△			
SYM	DISCRIPTION	DATE	APPROVED



TACLEX

TACLEX ELECTRONICS CO., LTD.

TOLERANCES UNLESS OTHERWISE SPECIFIED LINEAR: ± 0.1 ANGULAR: $\pm 3^\circ$		SIGNATURES	DATE	TITLE
		DRAWN 邱明義	2016.08.02	TACT SWITCH
		CHK'D ???	2016.08.02	NO.
REVISIONS A		SCALE 15:1	APPV'D Rex	2016.08.02

T1A2QR