



































































REV. A	ECN NO. OR DESCRIPTION PROPOSE ONLY	REVISION ERIC	DATE 2018.08.08
--------	--	------------------	--------------------

1	2	3	4	5	6
---	---	---	---	---	---










REV. A	ECN NO. OR DESCRIPTION PROPOSE ONLY	REVISED ERIC	DATE 2018.08.08
--------	--	-----------------	--------------------

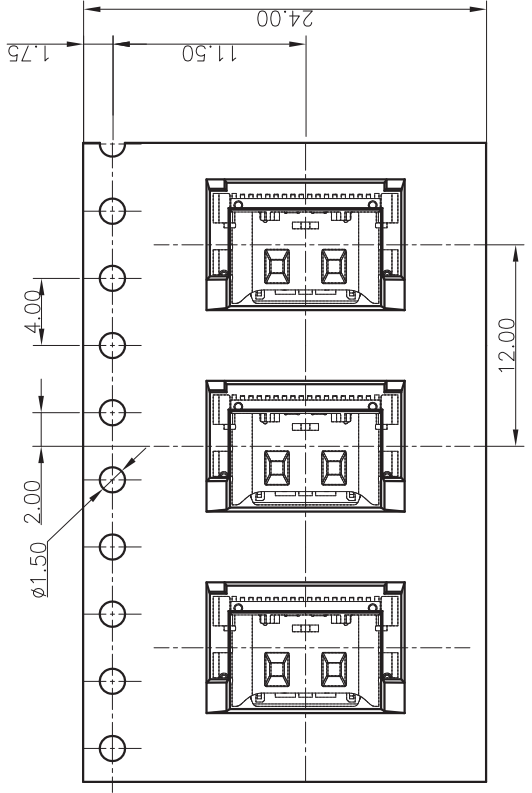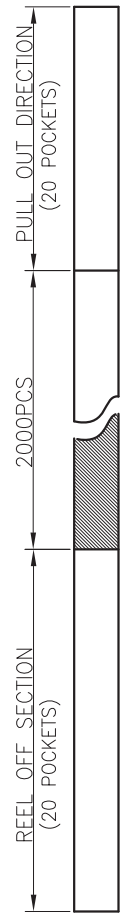

← PRODUCT PACKAGING DIRECTION
CUSTOMER TO USE DIRECTION →

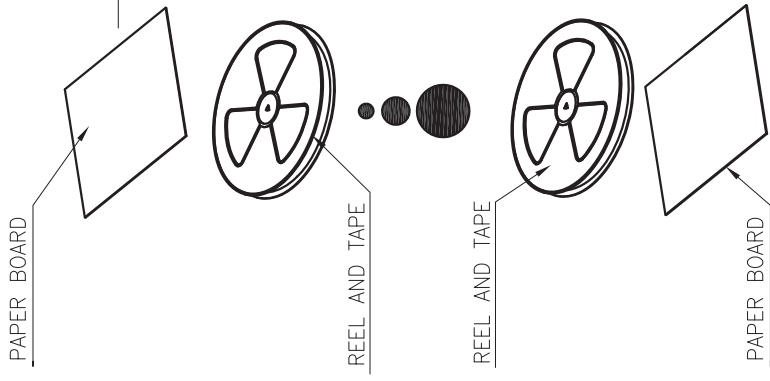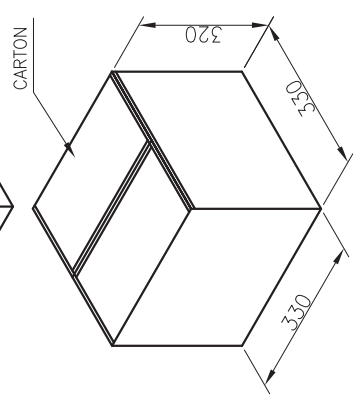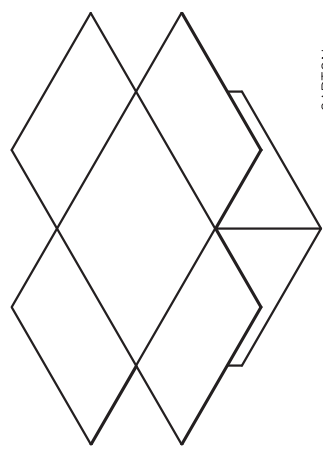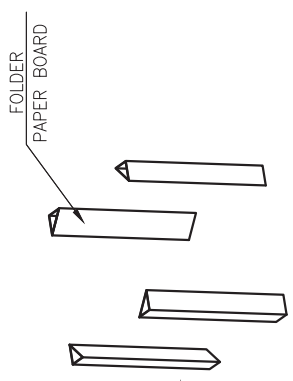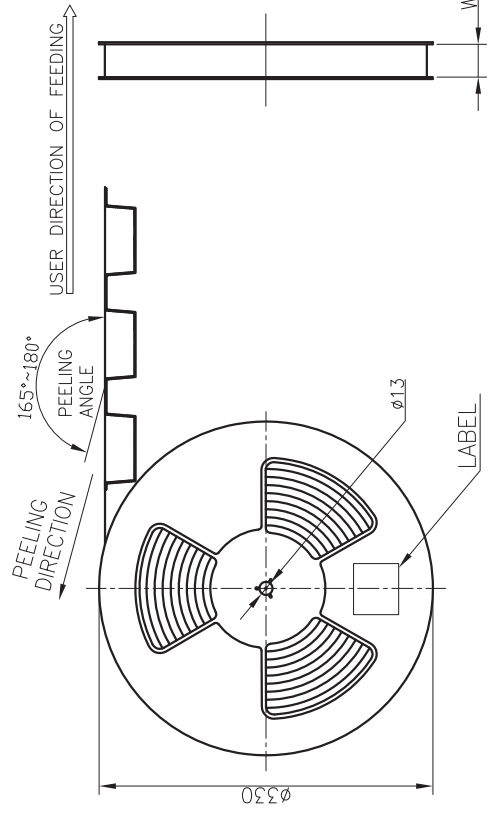

CONN. PART NO.	CONN. QTY./REEL	REEL QTY./CARTON	CONN. QTY./CARTON
TCR17-16121602-01	2000	10	20000 PCS

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:	ANGLES:
X : ±0.5	X : ±2°
X-X : ±0.30	X-X : ±1°
X-XX : ±0.20	
X-XXX : ±0.10	

TACLEX ELECTRONICS CO., LTD.

TITLE	Type.C 16PIN SMT CONN. RECTABLE
DWN	chenjun PART NO. TCR17-16121602-01
CHKD	chenjun SCALE:1:1 UNIT: mm
APVD	Kevin.d SIZE: A4 SHEET:10F1 REV: A
DRAW NO. C-DWG-TCR17-01 CUSTOMER COPY	